


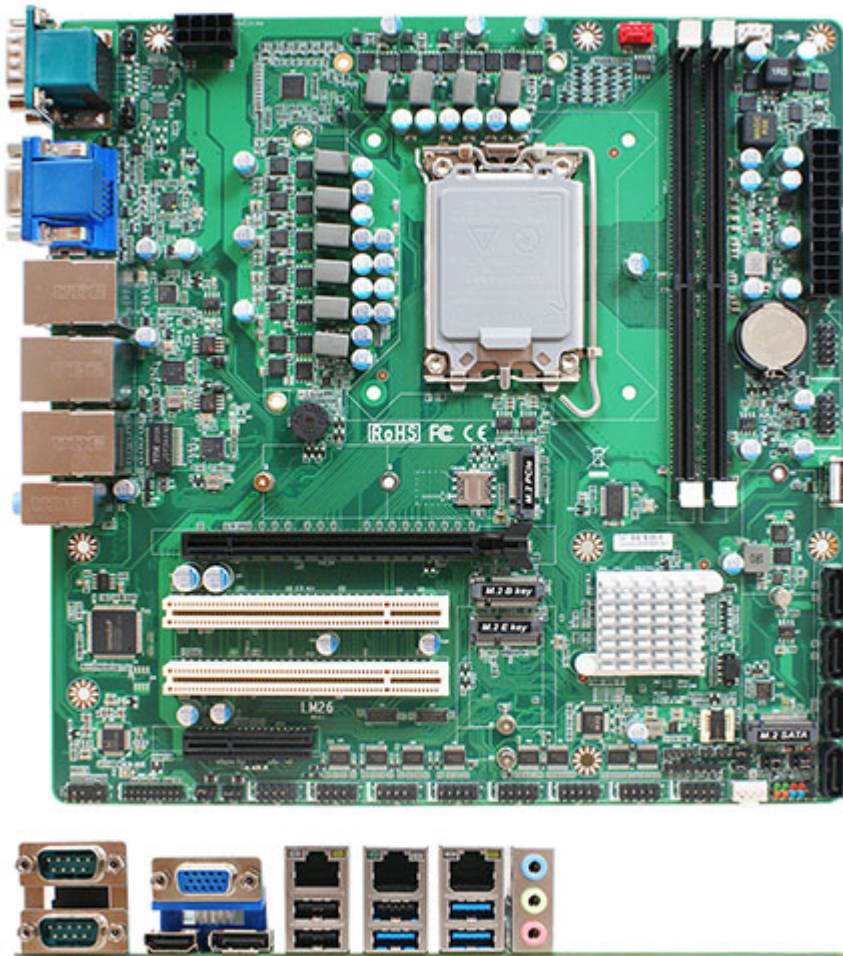

329.00 EUR

incl. 19% VAT, plus [shipping](#)

- H610 !
- 2x COM !
- Micro-ATX !
- 3x LAN / 3x Display !

- 1. Intel® 12/13th LGA1700 Socket Processor (Max.125W TDP)
- Intel® Alder Lake-S H610E / H610 Chip
- 2\* DDR4 3200MHz UDIMM up to 64GB
- 1\* VGA, 1\* HDMI, 1\* DP
- 2\* 2.5GbE, 1\* GbE
- 10 or 6\* COM, 3\* USB3.2 (Gen.1), 7\* USB2.0, 1\* USB2.0 Type-A (Vertical)
- 1\* M.2 M-key, 2242/2280 (PCI-Ex4), 1\* M.2 M-key, 2242/2280 (SATA), 1\* M.2 B-key, 3042/3052, 1\* M.2 E-key, 2230, 4\* SATAIII
- 1\* PCI-Ex16 (Gen.4), 1\* PCI-Ex4 (Gen.3), 2\* PCI
- Onboard TPM2.0 (Option)
- ATX Power

|                  |                                                                                                                                                                                                                                 |  |
|------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--|
| Model            | <ul style="list-style-type: none"> <li>– LM26-H6100 (10* COM)</li> <li>– LM26-H6102 (10* COM, TPM2.0)</li> <li>– LM26-H6100-6C (6* COM)</li> <li>– LM26-H6102-6C (6* COM, TPM2.0)</li> </ul>                                    |  |
| Form Factor      | – Micro ATX (244 * 244mm)                                                                                                                                                                                                       |  |
| Processor System | <ul style="list-style-type: none"> <li>– Intel® 12/13th LGA1700 Socket Core i9/i7/i5/i3/Pentium/Celeron Processor (Max. 125W TDP)</li> <li>– Intel® Alder lake-S H610 or H610E chipset</li> <li>– AMI Flash ROM BIOS</li> </ul> |  |
| Memory           | – 2* DDR4 3200MHz Dual Channel UDIMM up to 64GB                                                                                                                                                                                 |  |

|                |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
|----------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Storage        | <ul style="list-style-type: none"> <li>– 4* SATAIII (6 Gb/s, SATA4 Co-lay M.2 M key-M2)</li> <li>– 1* M.2 M-key (2242/2280 PCI-Ex4 Gen.3 interface, Co-lay PCI-Ex4)</li> <li>– 1* M.2 M-key (2242/2280 SATA interface, Co-lay SATA4)</li> </ul>                                                                                                                                                                                                                                    |
| Expansion      | <ul style="list-style-type: none"> <li>– 1* M.2 B-key (3042/3052, USB3.0/USB2.0, Support 4G/5G Module)</li> <li>– 1* M.2 E-key (2230, CNVi/PCI-Ex1/USB2.0, Support WIFI/BT Module)</li> <li>– 1* PCIe 4.0 x16 slot</li> <li>– 1* PCIe 3.0 x4 slot</li> <li>– 2* PCI slots</li> </ul>                                                                                                                                                                                               |
| Ethernet       | <ul style="list-style-type: none"> <li>– 2* Intel® i225-V 100/1000/2500Mbps</li> <li>– 1* Intel® i219-V 10/100/1000Mbps</li> </ul>                                                                                                                                                                                                                                                                                                                                                 |
| Graphics       | <ul style="list-style-type: none"> <li>– Intel® UHD Graphics, shared memory</li> <li>– 1* HDMI2.0 (Max Resolution: 4096×2304@60Hz)</li> <li>– 1* DP1.4 (Max Resolution: 7680×4320@60Hz)</li> <li>– 1* VGA (Max Resolution: 2560×1600@60Hz)</li> <li>– Support Triple Displays</li> </ul>                                                                                                                                                                                           |
| Audio          | <ul style="list-style-type: none"> <li>– HD audio: Realtek ALC888S</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                      |
| Watchdog Timer | <ul style="list-style-type: none"> <li>– From Super I/O to drag RESETCON#</li> <li>– 256 segments (10sec ~ 255min)</li> </ul>                                                                                                                                                                                                                                                                                                                                                      |
| Internal I/O   | <ul style="list-style-type: none"> <li>– 4* USB2.0 (PH2.54)</li> <li>– 1* USB2.0 (Vertical)</li> <li>– LM26-H610: 8* RS232</li> <li>– LM26-H610-6C: 4* RS232</li> <li>– 16bit GPIO (5V)</li> <li>– 4* SATAIII (SATA4 Co-lay M-key-M2)</li> <li>– 1* 24+8pin Power connector</li> <li>– 1* SIM Card hold</li> <li>– 1* Chassis intrusion</li> <li>– 1* FP_ Audio</li> <li>– 1* PS/2 + 1* SMBUS + 1*AT model</li> <li>– 1*CPU FAN Header(Smart FAN) + 2*SYSTEM FAN Header</li> </ul> |
| External I/O   | <ul style="list-style-type: none"> <li>– 3* USB3.2(Gen.1)</li> <li>– 3* USB2.0</li> <li>– 1* VGA</li> <li>– 1* HDMI2.0</li> <li>– 1* DP1.4</li> <li>– 2* COM (RS232/422/485)</li> <li>– 3* RJ45</li> <li>– 1* 3Jack (Line-in + Line-out + MIC)</li> </ul>                                                                                                                                                                                                                          |
| Power          | <ul style="list-style-type: none"> <li>– ATX PWR (24+8pin), AT/ATX Supported</li> <li>– AT: Directly PWR on as Power input ready</li> <li>– ATX: Press Button to PWR on after Power input ready</li> </ul>                                                                                                                                                                                                                                                                         |
| Compliance     | <ul style="list-style-type: none"> <li>– CE, FCC, LVD, RoHS, REACH (Option)</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                             |
| Temperature    | <ul style="list-style-type: none"> <li>– Operating Temperature: -10 ~ 60° C</li> <li>– Storage Temperature: -20 ~ 70° C</li> <li>– Humidity: 10% ~ 90% RH @40°C (non-condensing)</li> </ul>                                                                                                                                                                                                                                                                                        |
| OS Support     | <ul style="list-style-type: none"> <li>– Windows 10 / 11, Linux</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                         |